

Aliva®-403.4

Liquid Dosing Unit

Description


The dosing unit Aliva-403.4 for liquid accelerators enables an infinite setting of accelerator for small quantities.

Uses

- The BASIC Version is equipped with a simple control which is done entirely on the dosing unit itself, i.e. the amount of additive is set manually by means of the dosing knob and thus cannot be synchronized with a concrete spraying machine.
- The Aliva-403.4 is most suitable for manual spraying together with the concrete spraying machines Aliva-246 / Aliva 252 and Aliva 263.

Technical data

Dimensions

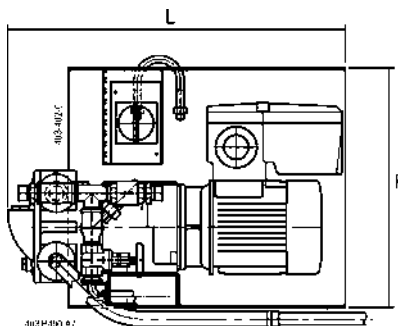

Length L	575 mm
Width	335 mm
Height H	430 mm
Weight	approx. 60 kg

Drive

Electric

Motor output	0,75 kW
Voltages	200 - 480 V
	50/60 Hz
Protection	IP 54/65

Theoretical data

Conveying

Conveying output *	24-240 l/h
Output pressure max.	7 bar

- * with the following tolerances
(measured with water):
- 25 l/h ± 1 l/h
 - 240 l/h ± 7 l/h

Safety instructions

Important safety regulations

For detailed informations please consult the latest edition of the machine operating manual.

Legal references

Information given, in particular suggestions made for use and application of our products are based on our current knowledge and experience in the normal case at the time of printing. In practice, the difference in materials, substrates and enviromental conditions can cause deviation from this information. Sika guarantees for its products the compliance of technical characteristics according to the Technical Data Sheets up to expiry of shelf life. Users of the products must always consult the latest edition of Technical Data Sheet under «www.sika.ch/stm». Our current General Conditions are applicable.



Aliva-403.4



Sika Schweiz AG
Tunneling & Mining
Tüffenwies 16, P.O Box
CH-8048 Zürich

Phone +41 56 649 31 11
Ordering
Chemistry 0800 85 40 40
Machines 0800 85 40 41